

# SV-6D

Item ref: 128.426TVA

User Manual

## 2:6 AUDIO MANAGEMENT SPEAKER SELECTOR WITH VOLUME CONTROL

### 1. Description

The SV-6D are switchable dual source speaker selectors with individual volume control for up to 6 different zones. With the switchable function, users can alternate between the two different amplifiers in each zone. This allows users to enjoy Source A in one room and Source B in another room.

### 2. Installation Consideration


The SV-6D are designed for use with amplifier with a maximum power of 900 Watts per channel at 8 ohms respectively. If you are uncertain about the power rating of your amplifier, consult the appliance's manufacturer.

It is recommended using only 8 ohm speakers when using the SV-6D. Furthermore, does not recommend installing more than 1 pair of speakers per pair of channels. Each pair of channels or terminal block is designed for 1 pair of speakers using up to 14 gauge wire.

Speaker wires can act as an antenna for electrical noise. Locating speaker wires too close to a light dimmers or switches may cause a buzzing or popping sound to be heard through the speakers. If you must locate the SV-6D wiring near electrical devices, route the speaker wires several inches away.

### 3. Installation

- Insert each wire into the appropriate hole on the removable terminals.
- Strip ¼" of insulation from the end of each wire. Tightly twist the end of each wire until no frayed ends remain. Use a small screwdriver to tighten each wire in place.
- Insert the connector plug into the socket and lock in place by tightening captive screws on each side of the connector. The inputs of SV-6D are the connecting terminals for the amplifiers. Be sure not reverse these connections or the SV-6D will not function properly.
- Each zone gets connected to a pair of speakers. Make sure you connect negative (-) to negative (-) and positive (+) to positive (+).

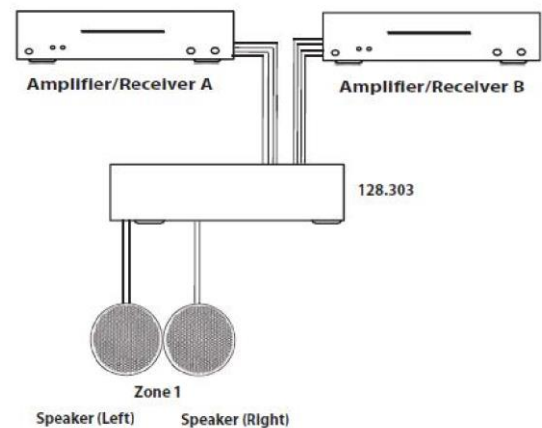

### 4. Operation

It is important to properly adjust an impedance-matching system to avoid distortion or DC clipping (DC voltage will produced from an amplifier that is overworked or that has an improper load). These can cause the amplifier to go into protection and can cause the SV-6D to heat up, damaging the system components. To set up the system, the amplifier volume should be at its lowest volume setting, and the selector volume control should be the highest setting. Slowly adjust the amplifier volume to a level that is acceptable without clipping.

- Make sure the amplifier power is OFF and set volume to minimum.
- Set the volume control for the speaker pair you wish to play to maximum. (Fully clockwise)
- Locate the on/off button which corresponds to the speaker pair you wish to play. Set it on the ON position.
- Gradually turn up the amplifier volume and set it an acceptable listening level. Be careful not to overdrive your amplifier.
- You can turn off the speakers by turning the appropriate volume control on the SV-6D full anti-clockwise, or by press the on/off button.

### Technical Specifications

Frequency response: 20Hz – 20kHz

Input source: up to 2 amplifier

Wiring requirement: up to 14 gauge wire

Speaker impedance: 8 ohms

Audio power handling: 100W/channel

Electrical or Electronic equipment and should not be disposed with other household or commercial waste at the end of its useful life. The goods must be disposed of according to your local council guidelines.

