


MA-500/MA-500E




59010-078-02

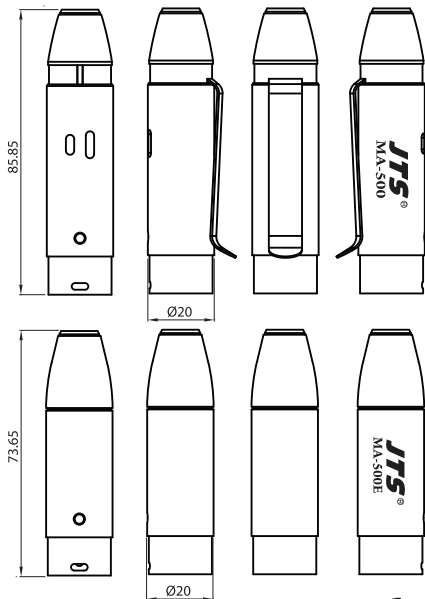

JTS[®]

MA-500 / MA-500E
Phantom Power Adapter

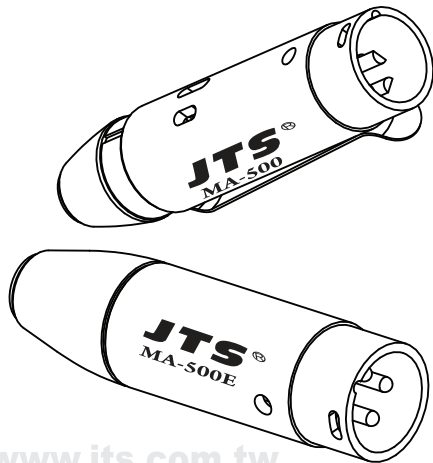


www.jts.com.tw

This product provides power to miniature condenser microphones through phantom power. It works with CM series condenser microphones and part of CX series microphones with mini XLR connector.

MA-500 / MA-500E

Phantom Power Adapter

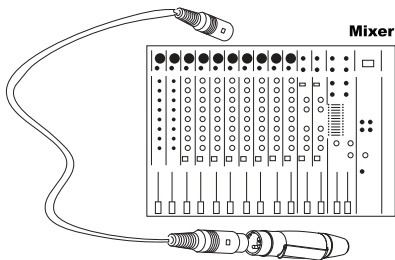


Input: 4P Mini XLR (Male)

Pin 1: GND

Pin 2: V+


Pin 3,4: Audio signal



Output: XLR (Male)

Pin 1: GND

Pin 2,3: Audio signal
(Phantom Power Supply)



MA-500/MA-500E can be powered by JTS's PS-1, Phantom Power Supply or 12~48V phantom power from other devices.

MA-500

MIC Input	4P Mini XLR(Male)
Output	XLR(Male)
Phantom Power	12~48V
PAD	-10dB
Low Cut	100Hz -6dB
	400Hz -4dB
Frequency Response	30~20,000Hz
Impedance	220Ω
THD% (1KHz -50dB)	<0.045%
S/N	>95 dB
Weight	40g
Dimensions(mm)	ø20(W)*84.5(H)

MA-500E

MIC Input	4P Mini XLR(Male)
Output	XLR(Male)
Phantom Power	12~48V
Frequency Response	30~20,000Hz
Impedance	220Ω
THD% (1KHz -40dB)	<0.045%
S/N	>95 dB
Weight	31g
Dimensions(mm)	ø20(W)*72.5(H)