



BEAMZ
MADE
EAZY

151.511 V3.0

BAC552Z

QUICK START GUIDE

CONTROL MENU

MENU		DESCRIPTION
A001	A001-A512	Press Up or Down to modify address codes (A001-A512), press ENTER to Save
CH10	CH10-CH18	Press Up or Down to modify Channels CH10,CH18, press ENTER to Save
N000	N000-N084	Press Up or Down to choose built-in effects (N000- N084), default N007, press ENTER to Save
S000	S000-S255	Press Up or Down to modify speed (S000- S255), default S024, press ENTER to save
S0UD	Soud	Sound-activated
R000	R000-R255	Press Up or Down to adjust red brightness (R000- R255), press ENTER to save
G000	G000-G255	Press Up or Down to adjust green brightness (G000- G255), press ENTER to save
B000	B000-B255	Press Up or Down to adjust blue brightness (B000- B255), press ENTER to save
W000	W000-W255	Press Up or Down to adjust white brightness (W000- W255), press ENTER to save
M000	M000-M2555	Zoom motor
T000	T000-T100	Display temperature

DMX CHANNELS

10 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1		000-255	Zoom
2		000-255	Dimmer
3		000-255	Strobe
4		000-255	R Red linear dimming
5		000-255	G Green linear dimming
6		000-255	B Blue linear dimming
7		000-255	W White linear dimming
8		000-255	Mode
9		000-255	Speed
10		000-249	No function
		250-255	Reset all

18 CHANNELS

CHANNEL	FUNCTION	VALUE	DESCRIPTION
1		000-255	Zoom
2		000-255	Dimmer
3		000-255	Strobe
4		000-255	The first circle of red LED
5		000-255	The first circle of green LED
6		000-255	The first circle of blue LED
7		000-255	The first circle of White LED
8		000-255	The second circle of red LED
9		000-255	The second circle of green LED
10		000-255	The second circle of blue LED
11		000-255	The second circle of White LED
12		000-255	The third circle of red LED
13		000-255	The third circle of green LED
14		000-255	The third circle of blue LED
15		000-255	The third circle of White LED
16		000-255	Mode
17		000-255	Speed
18		000-249	No function
		250-255	Reset all

TECHNICAL SPECIFICATIONS

Product colour	Black
Light source	4-in-1 LED
LED colours	Red, Green, Blue, White
LED power (single LED)	15W
Quantity of LEDs	19
Beam angle: Min	8°
Beam angle: Max	35°
Field angle: min	15°
Field angle: max	58°
Illuminance	96.513 lx @ 1m
Flash rate per second	1 – 23Hz
DMX channels	10, 18
DMX connection	3-pin XLR
Modes	Automatic programs, DMX, Master/Slave
Cooling	Temperature controlled fan
Display	LED
Power plug	Power-connector
Power consumption	2.69 – 1.44A
Power supply	100-240VAC 50/60Hz
Dimensions (L x W x H)	150 x 310 x 285mm
Weight	3,80
Included accessories	Mounting bracket, Power cable

Design and product specifications are subject to change without prior notice.

The products referred to in this manual conform to the European Community Directives to which they are subject:

European Union

Tronios B.V.,
Bedrijvenpark Twente Noord 18,
7602KR Almelo,
The Netherlands

2014/35/EU
2014/30/EU
2011/65/EC



United Kingdom


Tronios Ltd.,
Central 8, Caspian Close
Standford-le-Hope SS17 9FN,
United Kingdom

S.I. 2016:1101
S.I. 2016:1091
S.I. 2012:3032





Handwriting practice lines consisting of 20 horizontal dotted lines.

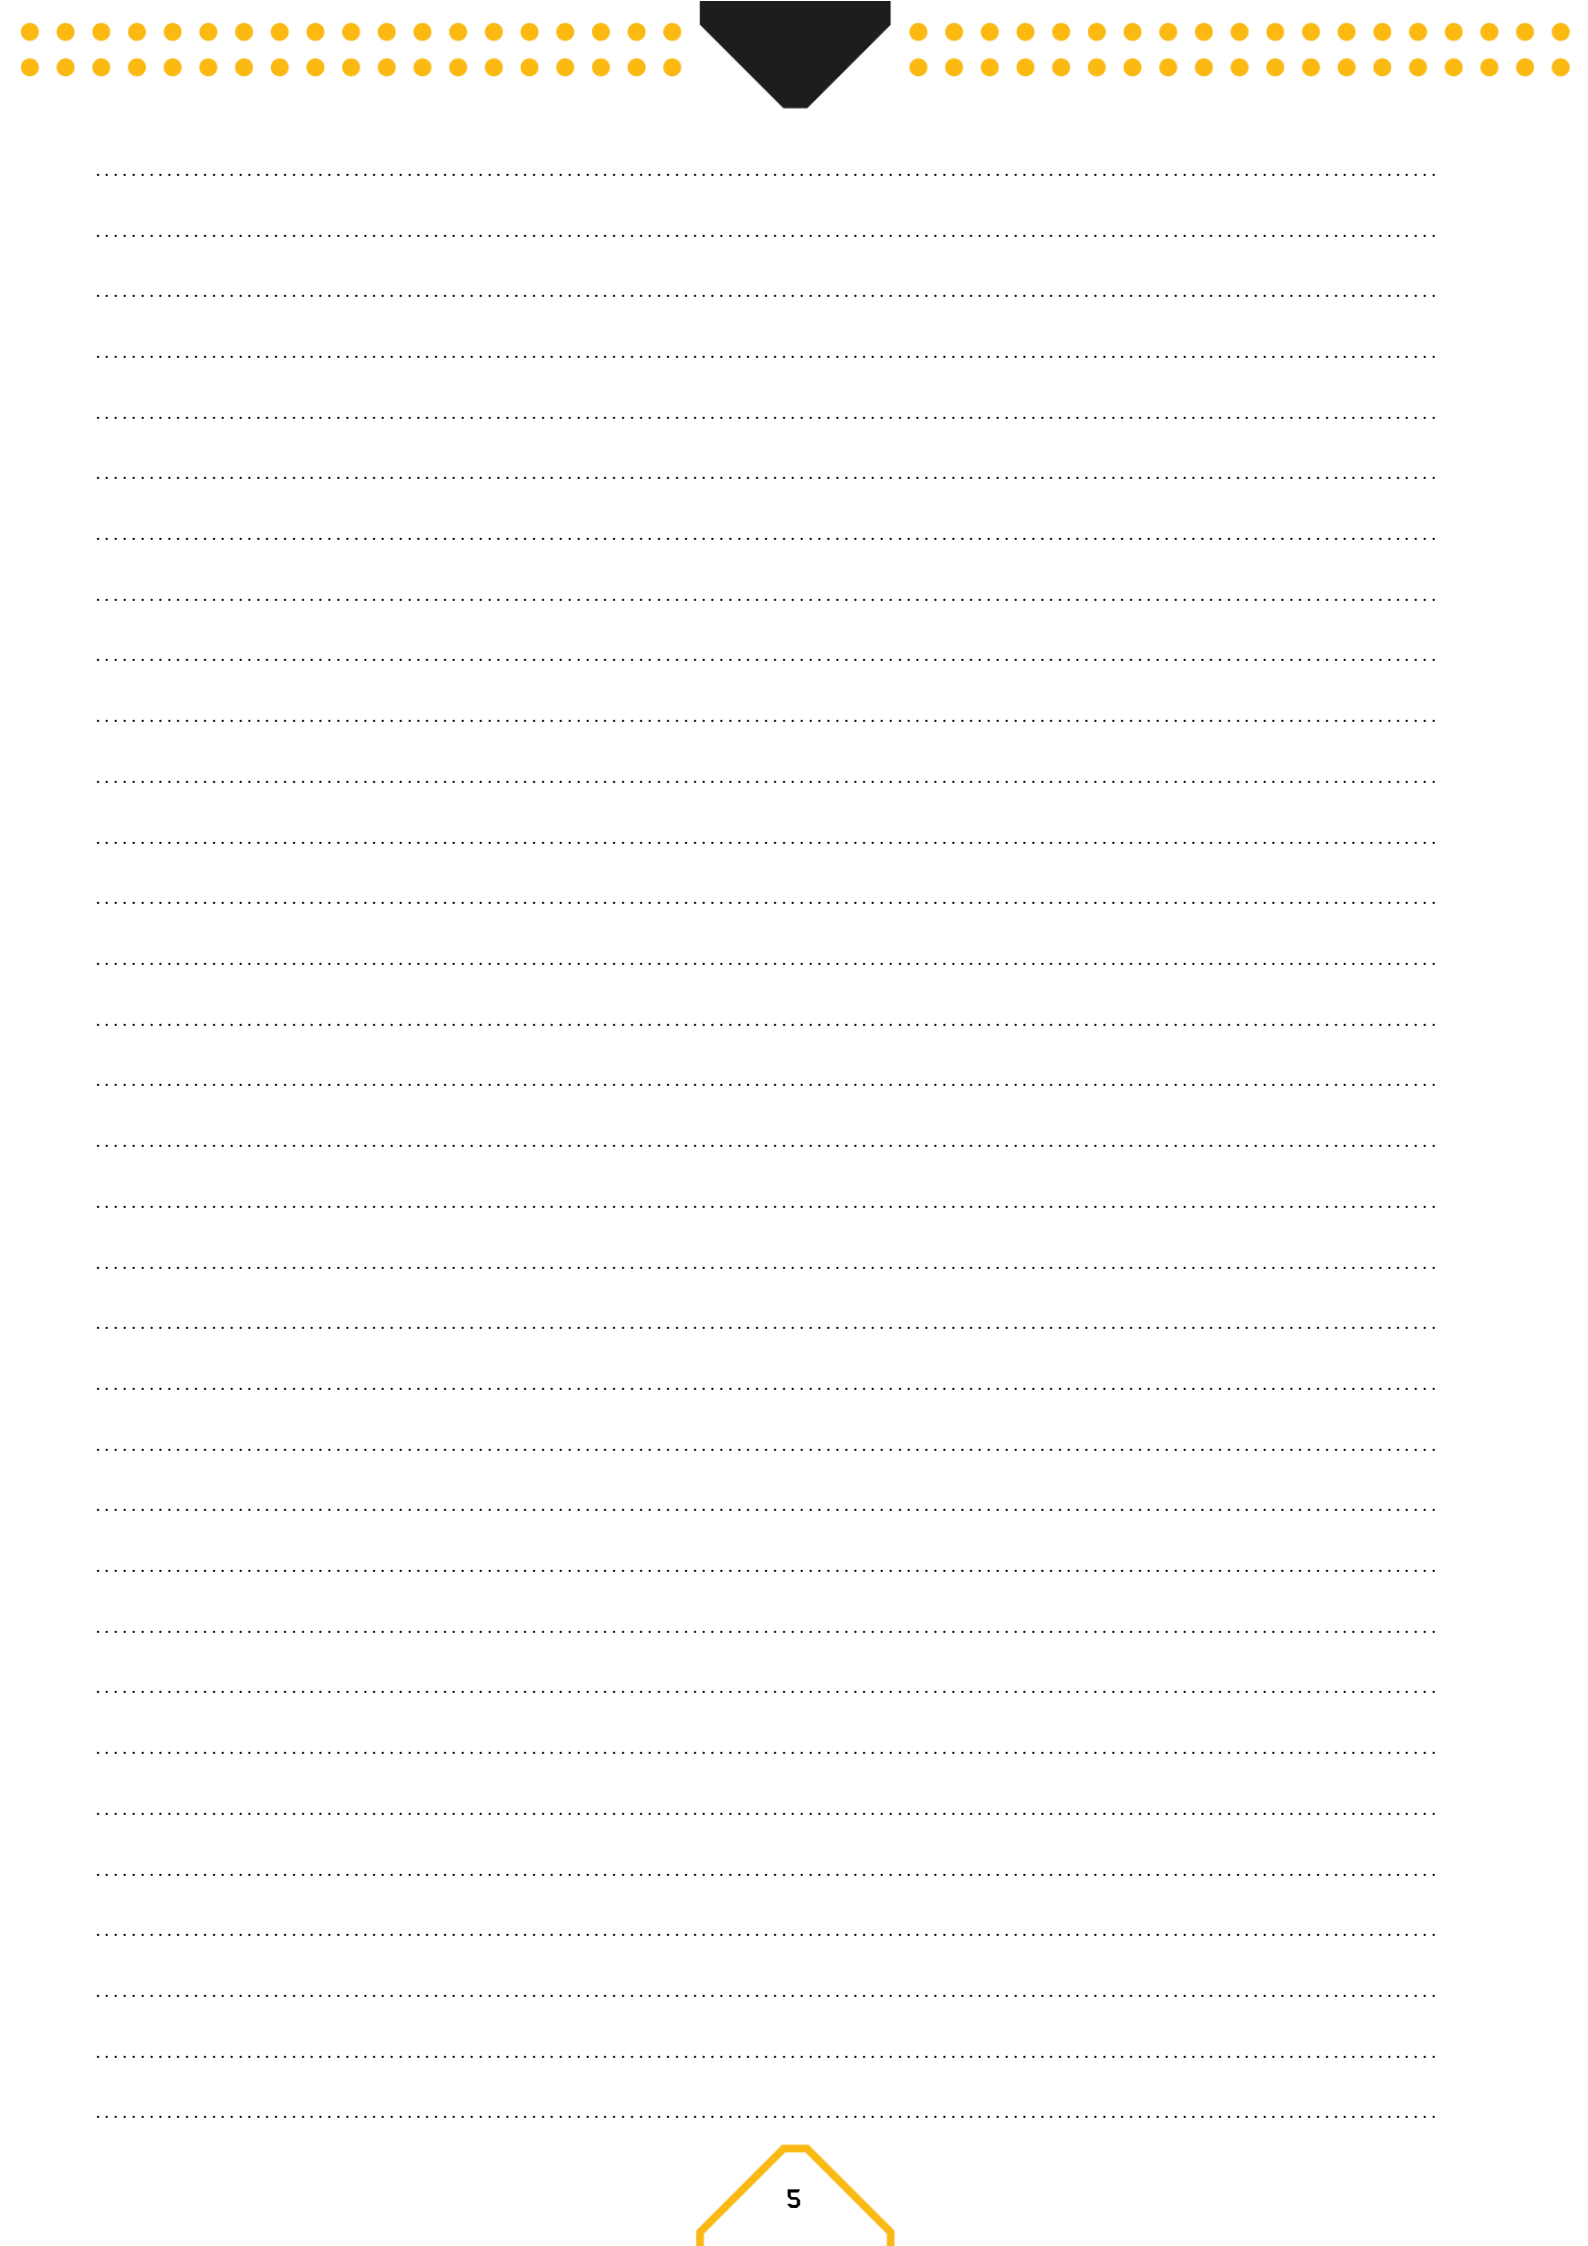



Handwriting practice lines consisting of 20 horizontal dotted lines.



BEAMZ

YOUR FUTURE
YOUR SKILLS
YOUR PLATFORM
YOUR PARTY
YOUR EVENT



is a leading developer of lighting products, including intelligent DMX moving heads, wireless battery operated DMX effects, static washes, sound-activated club effects, strobes & blacklights, LED lighting, fog and special effects machines, lasers and indoor and outdoor architectural lighting, as well as lighting controllers and protective bags.



BEAMZLIGHTING.COM